

OPEN RANGE
ULTRA LITE



TRAVEL TRAILERS & FIFTH WHEELS

EXPLORATION: UNCHARTED



Highland
RIDGE RV

Own the Outdoors

TRAVEL TRAILERS



UT2102RB



UT2802BH



UT2410RL



UT2804RK



UT2504BH



UT2910RL



UT2710RL



UT3310BH

FIFTH WHEELS



UF2502RE



UF2910RL



UF2804RK



UF2950BH

FLOORPLANS

FEATURES

STANDARDS

- » 1/2 Ton Towable (FW)
- » 100lb. Full Extension Drawer Guides
- » 8 Cu. Ft. Refrigerator
- » LED Lighting in Ceilings
- » Quick Recovery Gas/Electrical Water Heater
- » 15K A/C with Quiet Residential Return Air
- » Prepped for Observation Camera
- » Key Alike System
- » Aluminum Tread Entry Steps
- » Power Awning(s) with LED Lighting
- » Stainless Steel Appliances
- » Stainless Steel Under Mount Sinks (Kitchen & Lav)
- » Outside Enclosed Docking Station
- » 300lb. Accessory Hitch (FW)
- » Battery Disconnect
- » Solar Prep
- » Queen Mattress (60" x 80")
- » Seamless Countertops Throughout
- » Linoleum Throughout Main Living Areas
- » Patent Flush Floor Slides with Vinyl Flooring (No Carpet)
- » PVC Roofing Membrane (15 Year Warranty/ Non-Prorated)
- » Porcelain Toilet
- » Walk Around Queen Bed with Best in Class Headroom (FW)
- » Heat Registers Strategically Placed (No Registers in Floor)
- » 50 Amp Service (FW)
- » Pet Friendly
- » Pull Out Pet Dishes
- » Wi-Fi Ready

OPTIONS

- » 50 Amp Service with 2nd A/C Prep (Standard 5th Wheel) (2710,2802, 2804) (Forced 2910, 2950, 3110, 3310)
- » A/C - 2nd A/C, 13.5k BTU Ducted (must choose 50amp option) (2710, 2802, 2804, 2910, 2950, 3110, 3310)
- » BBQ Grill with Bumper Bracket
- » Bike Rack - LCI Jack-It Front Bike Rack (TT)
- » Power Front and Rear Stabilizer Jacks (TT)
- » Recliners ipo Std. Theater Seats (2804)
- » Table/Chairs ipo Std. Booth (N/A 2504, 2510)
- » Tri-Fold Sofa ipo Std Power Theater Seats (N/A 2910)
- » U-Lounge ipo Std. Theater Seats/Booth (2950)

SPECIFICATIONS

	UT2102RB	UT2410RL	UT2504BH	UT2710RL	UT2802BH	UT2804RK	UT2910RL	UT3310BH	UF2502RE	UF2804RK	UF2910RL	UF2950BH
Square Feet	220	222	232	262	267	260	300	331	277	280	317	320
UVW	5495	5322	5385	5710	5765	5900	6483	6795	2765	7360	7840	8270
Hitch Weight	550	502	592	707	510	675	822	900	1215	1100	1305	1320
GVWR	7400	7400	7400	7400	7450	7675	8600	8995	9995	9900	9995	9995
Cargo (Gross)	1905	2078	2015	1690	1685	1775	2117	2200	2730	2540	2155	1725
Length (Pin to Rear)	26' 9"	28' 5"	28' 11"	31' 5"	31' 9"	31' 9"	33' 5"	37' 5"	29' 3"	29' 11"	31' 11"	33' 11"
Ext. Height	131"	131"	131"	131"	131"	131"	131"	131"	150"	150"	150"	150"
Ext. Width	97"	97"	97"	97"	97"	97"	97"	97"	96"	97"	97"	97"
Ext. Width (Slides Out)	135"	135"	135"	135"	135"	135"	156"	135"	135"	135"	156"	156"
Interior Height (Upper Deck)	-	-	-	-	-	-	-	-	80"	80"	80"	80"
Interior Height (Overall)	82"	82"	82"	82"	82"	82"	82"	82"	92"	92"	92"	92"
Fresh Water (Gal.)	51	51	51	51	51	51	51	51	52	51	51	51
Gray Water (Gal.)	58	29	29	29	58	58	58	58	58	58	58	58
Waste Water (Gal.)	29	29	29	29	29	29	29	29	29	29	29	29
LP Capacity (lbs.)	60	60	60	60	60	60	60	60	60	60	60	60
Tire Size	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"
Awning Size	15'	15'	18'	20'	20'	20'	10', 11'	20'	20'	20'	9', 11'	21'

1 SLIDE OUTS

- » Best in class slide height and depth
- » Flush floor slides with linoluem
- » Electric Motor Slide System
- » Laminated components plus 3M flashing tape along corners to prevent leaks

4 FLOORS

- » Double-welded aluminum framed floors
- » Insulated with rigid foam, wrapped in radiant foil, anti-puncture moisture barrier woven underbelly material, and strengthened with an overlapping double layer of laminate

2 DOORS & LOCKS

- » Full-width entrance doors with built-in screen doors
- » Double-insulated passage and storage doors with slam latches on secure and convenient key-alike system

5 LAMINATED WALLS


- » Lightweight, double-welded aluminum walls
- » Each wall is laminated with rigid foam insulation

3 ROOF

- » Double batten insulation layered with radiant foil
- » Screw-mounted plywood decking topped with premium quality PVC
- » No treatment required! Will not chalk or spot
- » Heat reflecting properties keep coach cooler in the summer

6 MAIN BODY

- » Class-leading I-beam chassis and draw bars
- » Equa-Flex suspension system
- » Aluminum wheels with nitrogen-filled tires
- » EZ Lube hubs

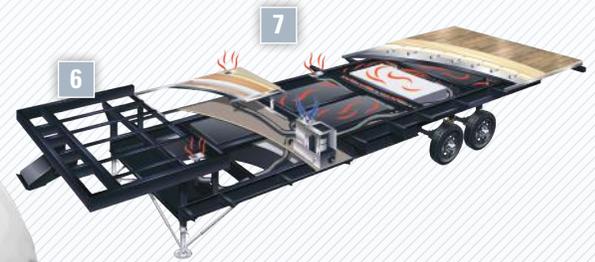

7 INDUSTRY-LEADING HEATING SYSTEM

Upsize 4-inch heat ducts run from the furnace down to the fully enclosed underbelly and wrap around the tanks suspended between the chassis I-beams. Holding tanks are warmed by the forced air heat which prevents freeze-ups.

A return at the end of the tank connecting back into the coach provides the necessary air flow.



We stand behind our products. At Highland Ridge RV, we are one of the few manufacturers that have a 3-Year Limited Structural Warranty.

MORE ROOM
LESS WEIGHT

This is our mission at Highland Ridge RV. It drives us to innovate and revolutionize the RV industry and it's why our products are 10 - 15% lighter than the competition.



Our Pet Friendly units offer linoluem throughout the main living areas, and no floor registers.



ZERO DEGREE
TESTED

We put our products into a zero degree chamber for five hours with thermometers placed in key areas throughout the unit. The results speak for themselves.

Your Ultra Lite Dealer:



For more information visit us at:
www.HighlandRidgeRV.com

Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error in the literature. Some items shown are not included as standard or optional equipment.